


ESR INSTALLATION SYSTEM FRAME WITH SPECIAL SIPHON AND DRAIN OFF CONNECTION

- allows quick and accurate installation of shower trays flush with the floor
- variable thanks to horizontally and vertically adjustable feet
- optimum sound insulation due to integrated sound insulation band, rubber mounting profile, corner support rubbers and noise-decoupled feet

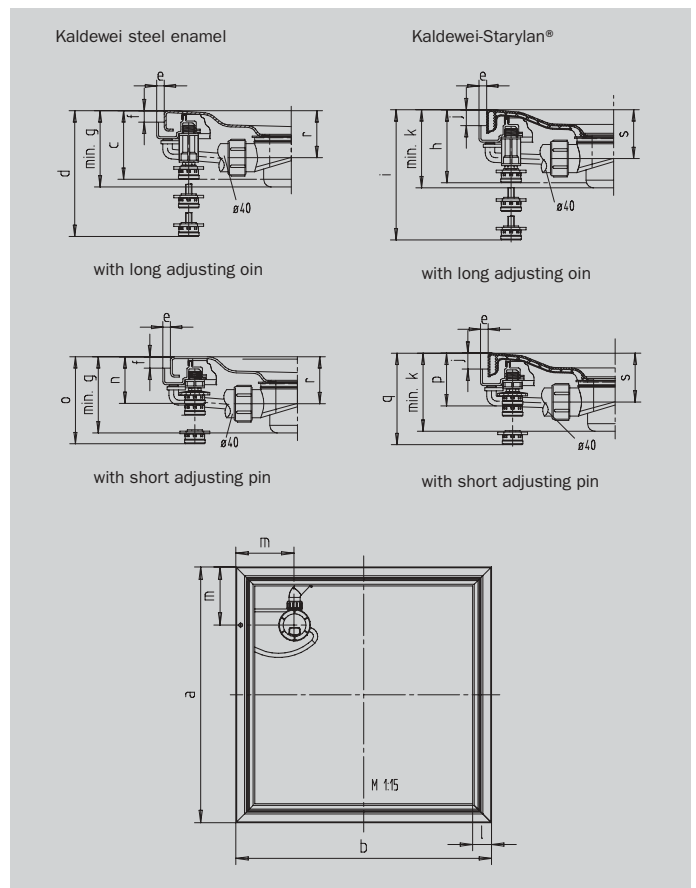

| Model no. | | 75/80 | 80/80 | 75/90 | 80/90 | 90/90 | 80/100 | 100/100 | 80/120 | 120/120 |
|--------------------------------|---|---------|---------|---------|---------|---------|---------|---------|---------|------------|
| External length | a | 820 | 820 | 920 | 920 | 920 | 1020 | 1020 | 1220 | 1220 mm |
| External width | b | 770 | 820 | 770 | 820 | 920 | 820 | 1020 | 820 | 1220 mm |
| Installed height min. | c | 110 | 110 | 110 | 110 | 110 | 110 | 110 | 110 | 110 mm |
| Installed height max. | d | 200 | 200 | 200 | 200 | 200 | 200 | 200 | 200 | 200 mm |
| Space for wall tile | e | 10 | 10 | 10 | 10 | 10 | 10 | 10 | 10 | 10 mm |
| Space for floor tile | f | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 20 | 20 mm |
| Shower tray height with siphon | g | 120 | 120 | 120 | 120 | 120 | 120 | 120 | 120 | 120 mm |
| Installed height min. | h | - | - | - | - | 115 | - | 115 | - | - |
| Installed height max. | i | - | - | - | - | 205 | - | 205 | - | - |
| Space for floor tile | j | - | - | - | - | 25 | - | 25 | - | - |
| Shower tray height with siphon | k | - | - | - | - | 128 | - | 128 | - | - |
| Frame width | l | 69 | 69 | 69 | 69 | 69 | 69 | 69 | 69 | 69 mm |
| Drain connection | m | 210 | 210 | 210 | 210 | 210 | 210 | 210 | 210 | 210 mm |
| Installed height min. | n | 78-94 | 78-94 | 78-94 | 78-94 | 78-94 | 78-94 | 78-94 | 78-94 | 78-94 mm |
| Installed height max. | o | 123-139 | 123-139 | 123-139 | 123-139 | 123-139 | 123-139 | 123-139 | 123-139 | 123-139 mm |
| Installed height min. | p | - | - | - | - | 83-99 | - | 83-99 | - | - |
| Installed height max. | q | - | - | - | - | 128-144 | - | 128-144 | - | - |
| Siphon connection height | r | 77 | 77 | 77 | 77 | 77 | 77 | 77 | 77 | 77 mm |
| Siphon connection height | s | - | - | - | - | 84 | - | 84 | - | - |

Take account of required plaster floor recess, dimensions a and b plus 4 mm

min. g = 160 mm for DUSCHPLAN (65 mm deep)

If the structural height is less than 130 mm, take account of floor recess.

Siphon connection height + 40 mm for DUSCHPLAN (65 mm deep)

The use of check valves is recommended.

| ESR Installation system frame with special siphon and drain off connection | Model Order No. | Dimensions cm | EUR |
|--|-----------------|---------------|-----|
| | 5845 7129 0000 | 75 x 80 | |
| | 5845 7128 0000 | 80 x 80 | |
| | 5845 7126 0000 | 75 x 90 | |
| | 5845 7125 0000 | 80 x 90 | |
| | 5845 7124 0000 | 90 x 90 | |
| | 5845 7123 0000 | 80 x 100 | |
| | 5845 7122 0000 | 100 x 100 | |
| | 5845 7121 0000 | 80 x 120 | |
| | 5845 7120 0000 | 120 x 120 | |